

# Android POS

A-200



Android 8.1



FULL HD



Wifi



Bluetooth



Speaker



2nd Display



Camera



**CONTACT US**

+82-2-6105-7261/7271



sales2@imupos.com

WATCHING THE  
IMU POS · KIOSK  
imupos.com



# VARIOUS I/O INTERFACE PROVIDED

- ✓ Various serial port
- ✓ Wide rooms between I/O ports

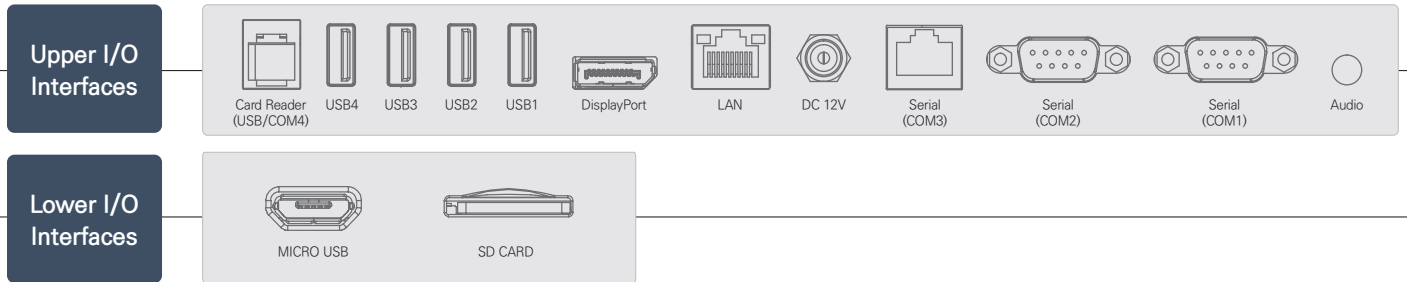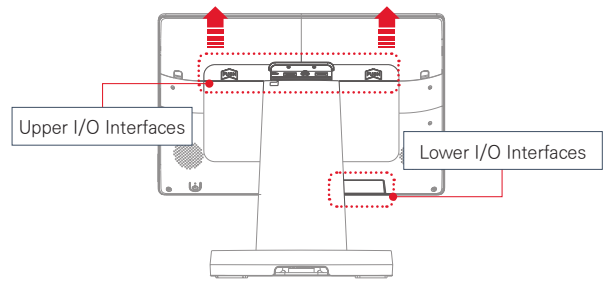

**One Touch**  
installation of  
2nd display



**Glass touch panel**  
Vivid view,  
No matter how long  
you look at



**Tighten connection**  
for power

## Specification

A-200	
<b>System</b>	
Operation System	Android 8.1
Processor	Rockchip RK3288 (Quad-core Cortex-A17)
Storage	eMMC 16GB
Sytem Memory	DDR3L 2GB
Primary Display	15.6" LCD WLED Backlight [(FHD / 1920 x 1080 / 350cd/m <sup>2</sup> (Typ))]
Touch panel	PCAP 10 Point Multi-touch
Speaker	2Wx 2 Channel / Stereo
<b>Network</b>	
WiFi	802.11b/g/n 2.4 GHz
Bluetooth	Bluetooth 4.2
Ethernet	1x RJ45 ethernet 10Mb/100Mb/1000Mb
<b>I/O Interfaces</b>	
External I/O Ports	2 x RS232 (DB9)   1 x RJ50   1 x Stereo + Mic Audio jack 3.5mm 1 x DC Jack (5.5 / 2.5) screw type   1 x RJ45 (LAN)   1 x Display port 4 x USB 2.0 (Type A), 1 x MicroUSB (ADB) 1 x RS232 + USB (RJ11)
2nd Display	1 x DP, included DP signal + 1 x USB + 12V, supported HDMI, DVI, VGA
<b>Peripheral Options</b>	
2nd Display	9.7" or 15" WLED Backlight (1024 x 768 Resolution)
Card Reader	IC Reader & MSR (ISO7816 - Support All Track)
Camera	CMOS Sensor 5M pixels, AF (optional)
<b>Physical Dimension</b>	
Dimension (W x D x H)	382 X 237 X 352 (mm)
Weight	4.0 Kg
<b>Environment</b>	
Power Supply	DC 12V/5A (AC 100V~240V, 60W)
Operation Temperature	Operating: 0 ~ 50°C
Storage Temperature	Operating: -20 ~ 70°C

\*Specifications are subject to change without prior notice.



#609, 115, Gasan digital 2-ro, Geumcheon-gu, Seoul, 08505, Republic of Korea  
 ☎ +82-2-6105-7261/7271 ✉ sales2@imupos.com 🌐 imupos.com

WATCHING THE  
IMU POS · KIOSK

