

# imu 2nd Display

9.7" / 15"

imu 2nd Display provide customer order and convenience



TFT LCD  
Display



True-Flat Capacitive  
10 Point Multi-touch  
(Optional)



1024 x 768  
Resolution



300 or 350 cd/m<sup>2</sup>  
White Luminance


## CONTACT US


+82-2-6105-7261/7271

sales2@imupos.com



WATCHING THE  
IMU POS · KIOSK  
imupos.com

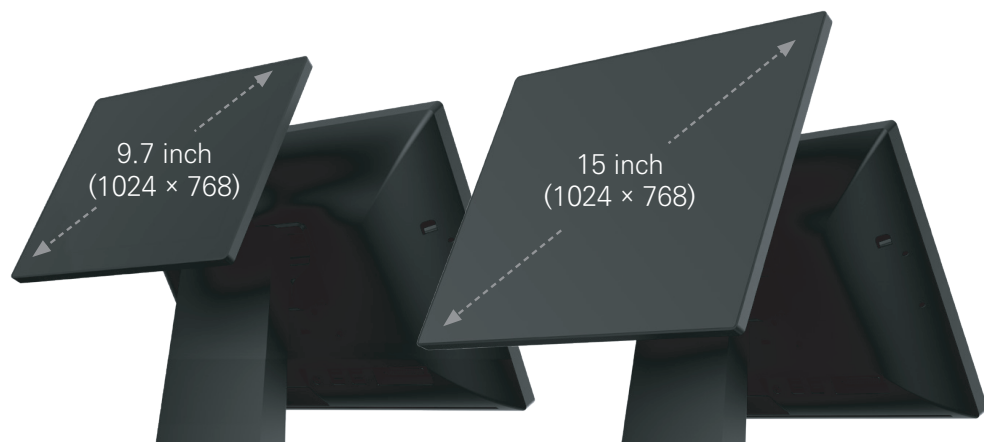

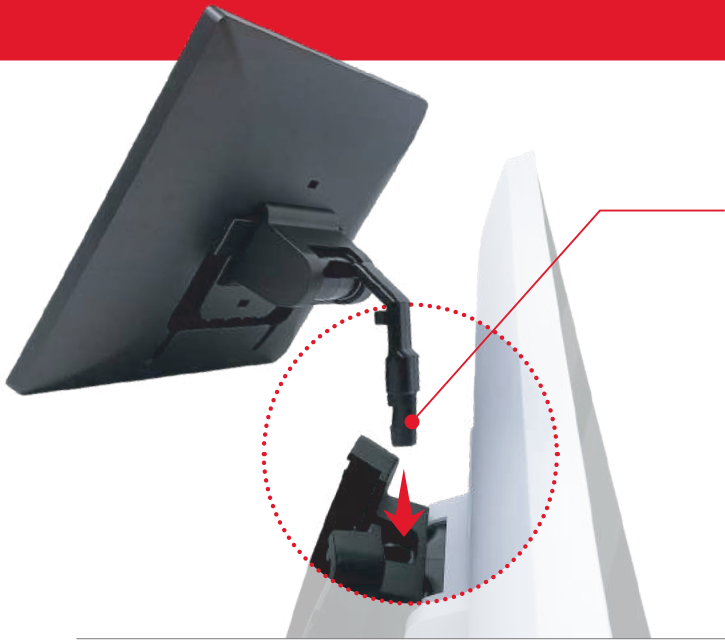

Technology


# One-touch installation of 2nd display

- ✓ Easy and quick installation with automatic coupling structure (Takes 2 minutes)
- ✓ One integrated Cable Structure



Monitor angle

- ✓ Rotate the 2nd display by 38degree left and right. (for both 9.7" and 15")
- ✓ Designed to be user-friendly, adjust the angle by rotating up and down.

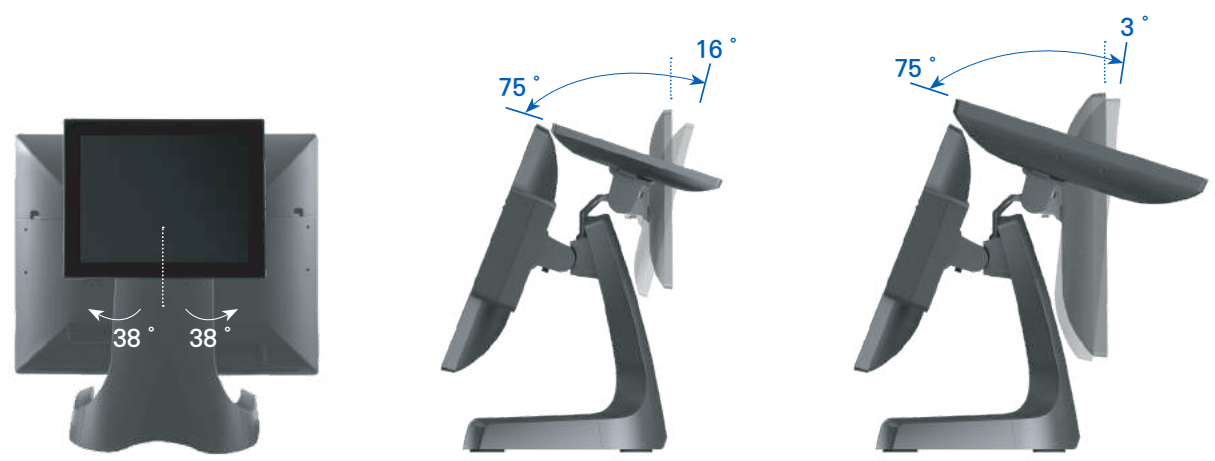

Specification

	9.7 "	15 "
Display Type	TFT LCD	
Touch (Optional)	True-Flat Capacitive 10 Point Multi-touch	
White Luminance	350 cd/m <sup>2</sup>	300 or 350 cd/m <sup>2</sup>
Resolution	1024 x 768 (px)	
Interface	DisplayPort (Included USB2.0 / DC 12V)	
Output Port	USB2.0 x 1	
Viewing Angle (Min)	80 ~ 89 °	
LED Life Time (Min)	15000 Hrs	50000 Hrs
Temperature (Operation /Storage)	0 ~ 50°C	
Dimensions (W x D x H)	241.2 x 25 x 194.2 (mm) *Exclude HINGE	360 x 35 x 284 (mm) *Exclude HINGE
Weight	930 g	2.60 kg

\*Specifications are subject to change without prior notice.



#609, 115, Gasan digital 2-ro, Geumcheon-gu, Seoul, 08505, Republic of Korea  
 +82-2-6105-7261/7271 sales2@imupos.com imupos.com

