

imu

POS SYSTEM 200

IMU enhances the brand
value of customers

All-in-One
POS Terminal



CONTACT US

☎ +82-2-6105-7261/7271

✉ sales2@imupos.com



WATCHING THE
IMU POS · KIOSK
🌐 imupos.com

POS SYSTEM 200

Designed as considering user's convenience

- #DURABILITY
- #SAFETY
- #MAINTENANCE
- #CONVENIENCE



Full Aluminum frame structure to optimize CPU heat dissipation

- Fanless application even for high-end CPUs (i3/i5/i7)
- Excellent anti-static effect and longevity of internal components



One-touch installation of 2nd display

- Easy and quick installation with automatic coupling structure (Takes 2 minutes)
- One integrated Cable Structure (One Cable – Power/Touch/DATA)
- Adjust the monitor angle by rotating up, down, left and right



Glass touch panel

- High screen clarity and low fatigue even when used for a long time
- Safe from scratches and can keep a clean screen for a long time




Secure Safety through tightening connection

- Prevent reverse current-protect main PCB
- Tighten connection for power
- Application of the plug type regardless of the direction of the power cable (Connection protection)



SSD Sliding structure design

- Easy switch SSD – Takes only 5 second
- Prevention of damage due to reverse insertion
- Rail structure to absorb vibration (SSD protection even in micro vibrations)



CPU
**Intel® 12th i3/i5/i7
N97, N95, N150**




MEMORY
**4GB (Max. 32GB)
8GB (Max. 16GB)**




SSD
512GB (Max)

I/O Interfaces

VARIOUS I/O INTERFACE PROVIDED 6 SERIAL, 6 USB


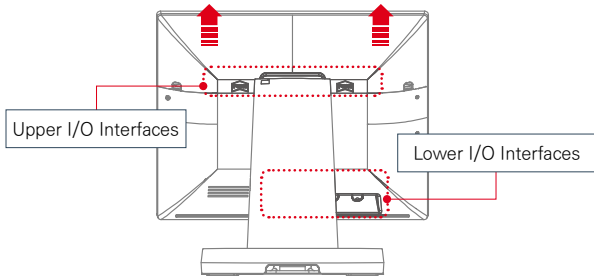


- ✓ Various serial port
- ✓ Wide rooms between I/O ports
- ✓ Multi display available (3 Products)

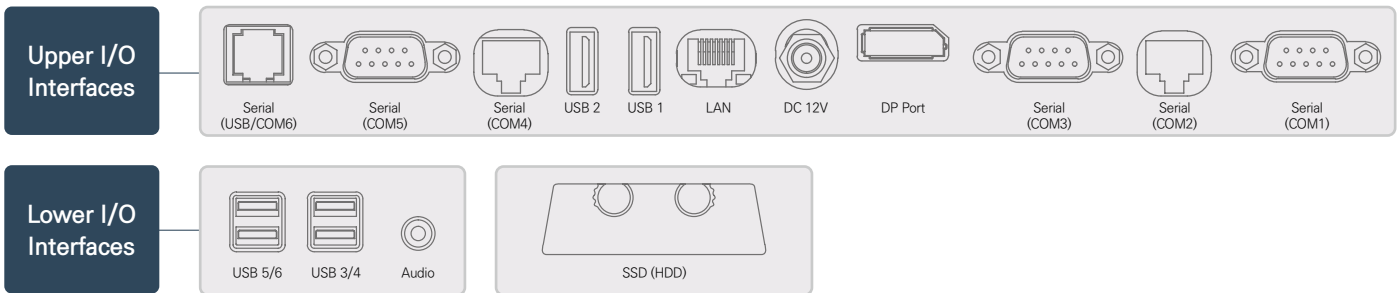

Peripheral Options

YOU CAN SELECT AND USE VARIOUS COMBINATIONS

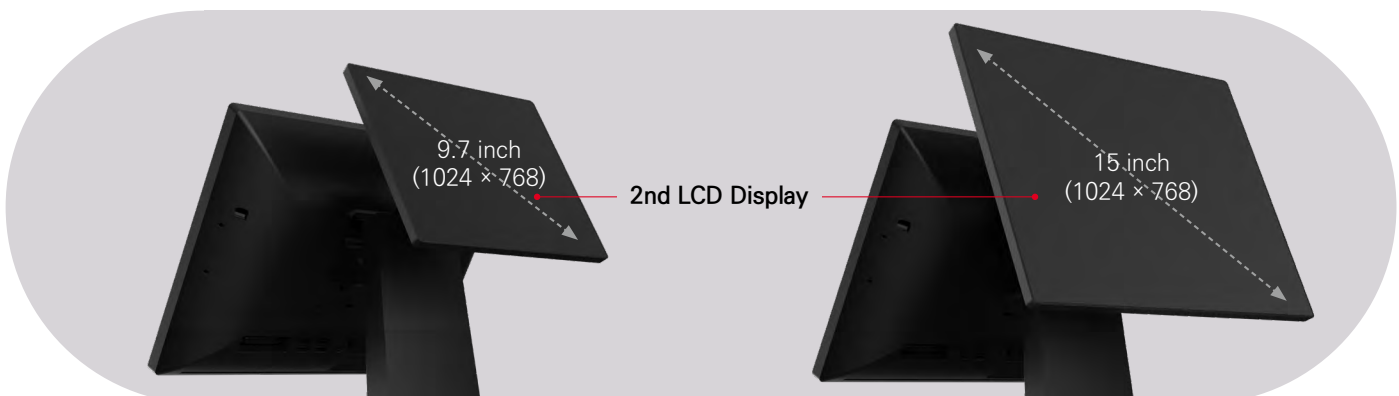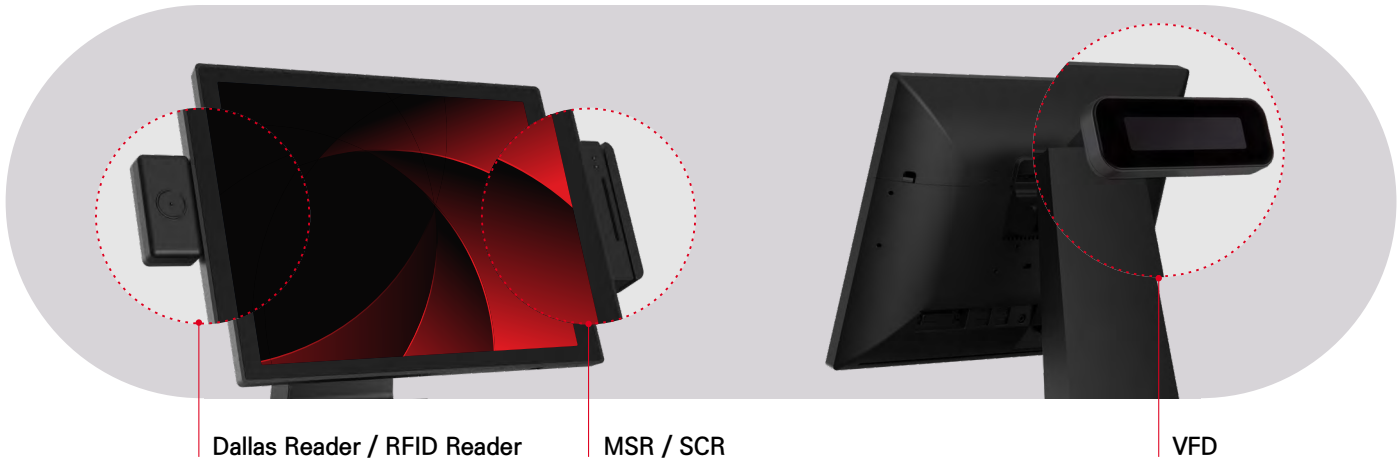

Specification

	N-200	NA-200	NT-200
System			
Processor	Intel® Processor N97, up to 3.60 GHz (Fanless)	Intel® N95 (4 Core, Max Turbo Frequency 3.40GHz) TDP 15W	Intel® N150(4 Core, Max Turbo Frequency 3.60GHz) TDP 6W
Chipset / BIOS	Intel® Alder Lake-N SoC / AMI UEFI	Integrated on SOC / AMI BIOS	
Storage	2.5" SATA III SSD 128GB (Max. 512GB, optional)	2.5" SATA III SSD 128GB (Max. 512GB, m.2 NVME 2280 SSD optional)	
Memory	8GB SO-DIMM DDR4 3200MHz x 1 slot (Max. 16GB)		
Graphics	Intel® UHD 1.2GHz(Execution Units 24)	Intel® UHD 1.20GHz (Excution Units 16)	Intel® UHD 1GHz(Excution Units 24)
OS	Windows 10 IoT Enterprise(64bit), Windows 11 IoT Enterprise(64bit)		
Display			
Primary Display Type	15" LED Backlight (1024 x 768 Resolution)		
Touch	PCAP 10 Point Multi-touch		
I/O Interfaces			
Rear Top & Bottom Ports			
USB	7 (USB 2.0/Rear Top x 2, USB 2.0/RJ11 x 1, USB 3.0/Rear Bottom x 4)		
Serial	6 (DB9 x 3, RJ50 x 2, RJ11 x 1)		
Audio	1 x Audio-out / 3.5mm		
Extend Displays	1 x DP output		
LAN	1 x RJ45 (Base-T 10/100/1000 Ethernet)		
Speaker	1 x 3W		
Peripheral Options			
Secondary Display	<ul style="list-style-type: none"> LCD Type: 9.7" or 15" LCD (USB Port x 1) Touch Monitor: 9.7" or 15" LCD with Capacitive Touch (USB Port x 1) - by single cable(no power & USB cable) 		
Customer Display (CDP)	FSTN LCD Type(20 columns x 2 lines)		
Card Reader (MSR)	Magnetic Stripe Reader: ISO 7811 ID-1 All tracks		
Dallas Reader	Dallas Reader(i-button): 6 characters / prefix and suffix		
Wireless	802.11 b/g/n/ac, Bluetooth 5.1		
Physical Dimension			
Dimension (W x D x H)	362 x 237 x 352 (mm) / 14.2 x 9.3 x 13.8 (inch)		
Weight	5,0 kg / 11.0 lb		
Box Dimension			
Dimension (W x D x H)	430 x 290 x 430 (mm) / 16.9 x 11.4 x 16.9 (inch)		
Weight	6,9 kg / 15.2 lb		
Environment			
Power Supply	DC 12V/5A (AC 100V~240V, 60W)		
Temperature	Operating Temp: 0 ~ 40°C / Storage Temp : -20~60°C / Humidity: 20% to 90%		
Certifications	CE, FCC, KC		

*Specifications are subject to change without prior notice. *The weight of the box varies depending on the components and the main board. (includes box weight)



Specification

S-200RL

System	
Processor	13th Generation Intel Core™ Processors Core i3-1215U / Core i5-1235U / Core i7-1255U (Fanless)
Chipset / BIOS	Intel® Alder Lake SoC / AMI UEFI
Storage	2.5" SATA III SSD 128GB (Max. 512GB, m.2 NVME 2280 SSD optional)
Memory	8GB SO-DIMM DDR4 3200MHz x 1 (Max 32GB, optional)
Graphics	Core™ i3-1215U Intel® UHD Graphics for 12th Gen Intel Processors Core™ i5-1235U / Core™ i7-1255U Intel® Iris Xe Graphics(Execution Units 80)
OS	Windows 10 IoT Enterprise(64bit), Windows 11 IoT Enterprise(64bit)
Display	
Primary Display Type	15" LED Backlight (1024 x 768 Resolution / 400cd/m ²) 15.6" LED Backlight (1920 x 1080 Resolution / 300cd/m ²)
Touch	PCAP 10 Point Multi-touch
I/O Interfaces	
Rear Top & Bottom Ports	
USB	7 (USB 2.0/Rear Top x 2, USB 2.0/RJ11 x 1, USB 3.0/Rear Bottom x 4)
Serial	6 (DB9 x 3, RJ50 x 2, RJ11 x 1)
Audio	1 x Audio-out / 3.5mm
Extend Displays	1 x DP output
LAN	1 x RJ45 (Base-T 10/100/1000 Ethernet)
Speaker	1 x 3W
Peripheral Options	
Secondary Display	<ul style="list-style-type: none"> LCD Type: 9.7" or 15" LCD (USB Port x 1) Touch Monitor: 9.7" or 15" LCD with Capacitive Touch (USB Port x 1) - by single cable(no power & USB cable)
Customer Display (CDP)	FSTN LCD Type(20 columns x 2 lines)
Card Reader (MSR)	Magnetic Stripe Reader: ISO 7811 ID-1 All tracks
Dallas Reader	Dallas Reader(i-button): 6 characters / prefix and suffix
Wireless	802.11 b/g/n/ac, Bluetooth 5.1
Physical Dimension	
Dimension (W x D x H)	362 x 237 x 352 (mm) / 14.2 x 9.3 x 13.8 (inch)
Weight	5.0 kg / 11.0 lb
Box Dimension	
Dimension (W x D x H)	430 x 290 x 430 (mm) / 16.9 x 11.4 x 16.9 (inch)
Weight	6.9 kg / 15.2 lb
Environment	
Power Supply	DC 12V/7A (AC 100V~240V, 84W)
Temperature	Operating Temp: 0 ~ 40°C / Storage Temp : -20~60°C / Humidity: 20% to 90%
Certifications	CE, FCC, KC

*Specifications are subject to change without prior notice.

*The weight of the box varies depending on the components and the main board. (includes box weight)



POS · KIOSK · Mobile Store Order Platform



#609, 115, Gasan digital 2-ro, Geumcheon-gu, Seoul, 08505, Republic of Korea
+82-2-6105-7261/7271 sales2@imupos.com imupos.com

WATCHING THE
IMU POS · KIOSK

